




# CLASSIC SERIES 600 MULTI-SLIDE DOOR

## PRODUCT DATA SHEET



FOR MORE  
CAD DETAILS  
SCAN HERE

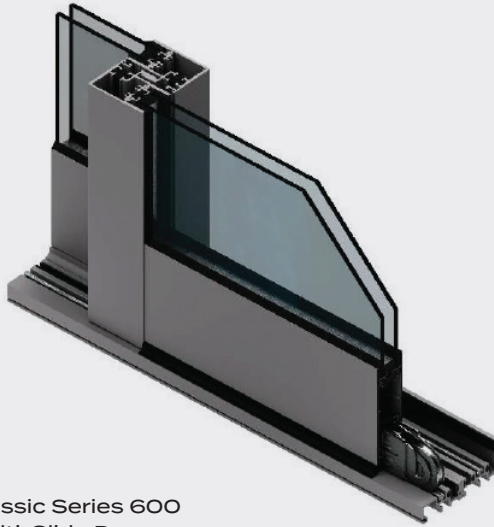

### Classic Series 600 Multi-Slide Door

The Series 600 Multi-Slide Door features large, unobstructed rolling glass panels that stack or slide into pockets to create extra-wide openings for indoor-outdoor commercial and living spaces. It is available with panels up to 12 feet tall (or a maximum of 60 square feet). And even with extreme panel sizes, it is easy to operate, thanks to sealed stainless steel ball bearing rollers. The aluminum frame's clean lines, narrow profile, and high-quality anodized or painted finishes deliver a contemporary aesthetic that seamlessly blends into nearly any space.

### Energy Efficiency

- Low-E, argon-filled dual-paned glass
- .36 U-value

### Hardware

- 1.81" roller
- 3" Monster roller
- Water barrier sill
- Flush sill
- Thinline sill
- Flush-mounted handle
- Premium handle
- Contemporary handle

### Options

Sill options include a water-barrier sill, featuring a 1.5" interior leg and weep system to keep out water; a flush sill, which is best when ease of entry is more important than keeping out the elements; and the Thinline sill, which is ideal in situations where the continuation of flooring from the inside to the outside appears seamless. Handle options include a flush-mounted handle, which allows panels to slide past each other and stack flush or into a pocket. The premium handle features a minimal one-piece design and comfortable grip. Both handles have an optional keyed cylinder.

### Finishes and Colors

Finishes are available in-stock or as designer selections, and they can be customized to match nearly any color. Bronze Anodized and Satin Anodized come standard with a Class 1 coating thickness for increased smoothness and durability. Our designer colors include a high-quality paint finish that conforms to a minimum rating of AAMA-2605, currently the highest rating for organic finishes.

### Performance Table

|                                                                    |                                           |
|--------------------------------------------------------------------|-------------------------------------------|
| Frame Depth                                                        | 1.98" Per Track                           |
| AAMA Product Designation (AAMA/WDMA/CSA101/I.S.2/A440 Designation) | LC-PG25-120x96-SD                         |
| Test Configuration                                                 | 120" x 96" P2X                            |
| Air Infiltration (Per ASTM E 283)                                  | .30 cfm/sf @1.57 psf                      |
| CSA A440 Air                                                       | N/A                                       |
| Water Resistance (Per ASTM E 547)                                  | 3.75 psf                                  |
| Uniform Load Deflection (Per ASTM E 330)                           | 25 psf                                    |
| Uniform Load Structural (Per ASTM E 330)                           | 37.5 psf                                  |
| Forced Entry Resistance                                            | ASTM F842 Type A Grade 10 CAWM 300 Type I |
| U-Factor (Per NFRC 100)*                                           | 0.36                                      |
| CR (Per NFRC 500)*                                                 | 43                                        |
| CRF Frame (Per AAMA 1503)                                          | 32                                        |

Actual values may vary depending on product specifications and configuration.

\* Glass Makeup = 1" OA E366/Argon/Clear




# CLASSIC SERIES 600 MULTI-SLIDE DOOR


## PRODUCT DATA SHEET




FOR MORE  
CAD DETAILS  
SCAN HERE

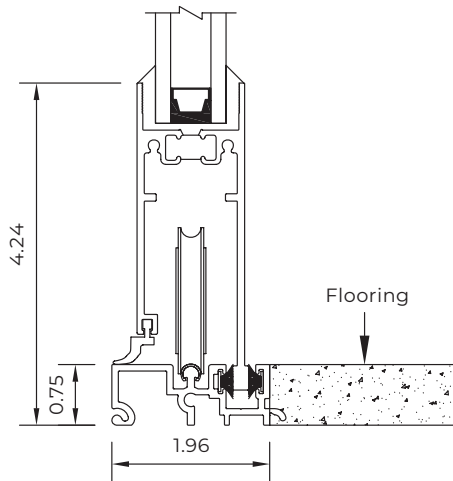


Flush Threshold With  
1.81 Diameter Roller

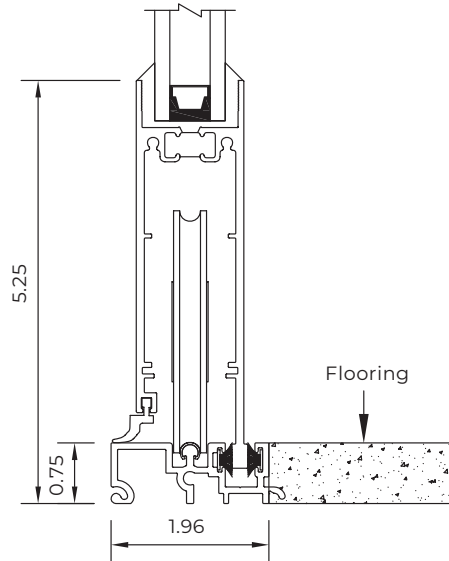

Flush Threshold With  
3.00" Diameter Roller

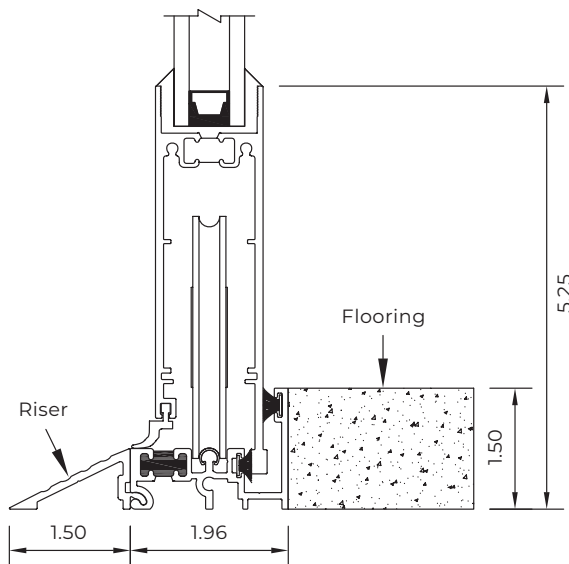

Water Barrier Threshold With  
3.00" Diameter Roller And Riser

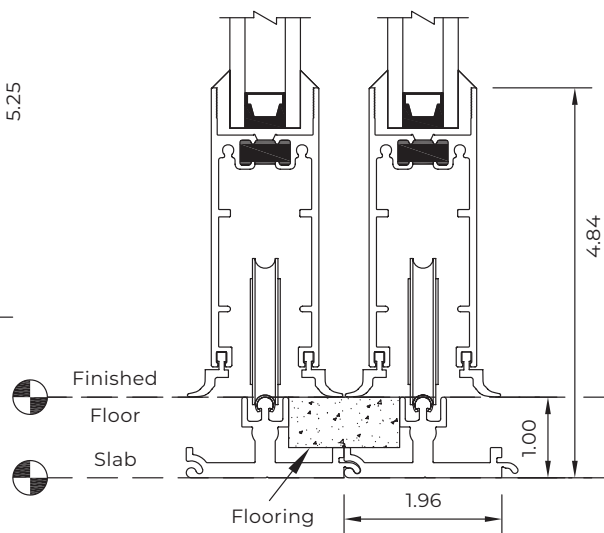

Thinline Threshold With  
1.81" Diameter Roller




# CLASSIC SERIES 600 MULTI-SLIDE DOOR


## PRODUCT DATA SHEET




FOR MORE  
CAD DETAILS  
SCAN HERE

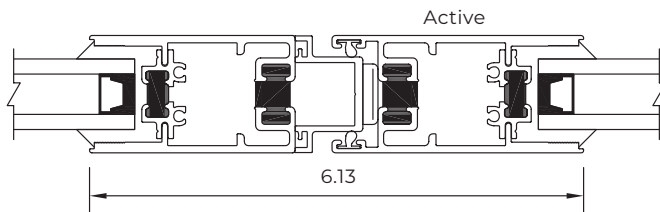


Bi-Parting Condition

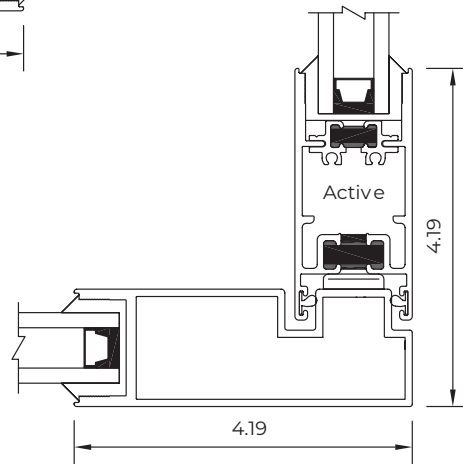

90-Degree Condition

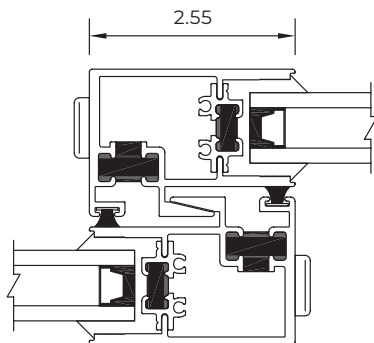

Interlocking Condition

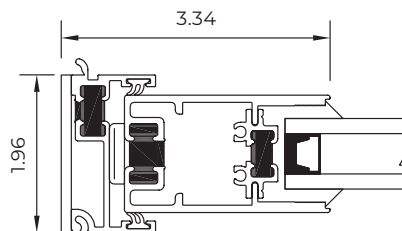

Fixed Position





# CLASSIC SERIES 600 MULTI-SLIDE DOOR

PRODUCT DATA SHEET



FOR MORE  
CAD DETAILS  
SCAN HERE

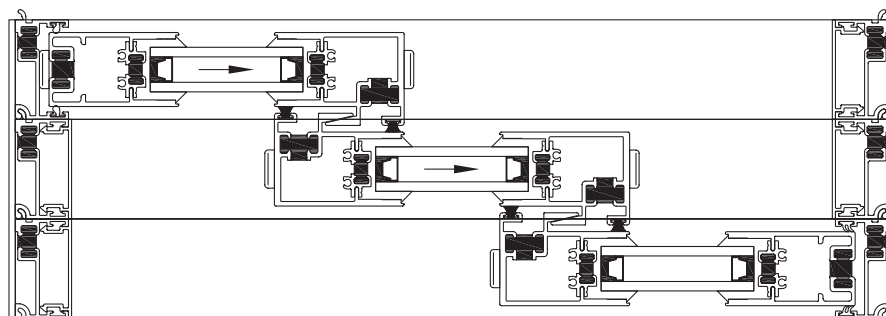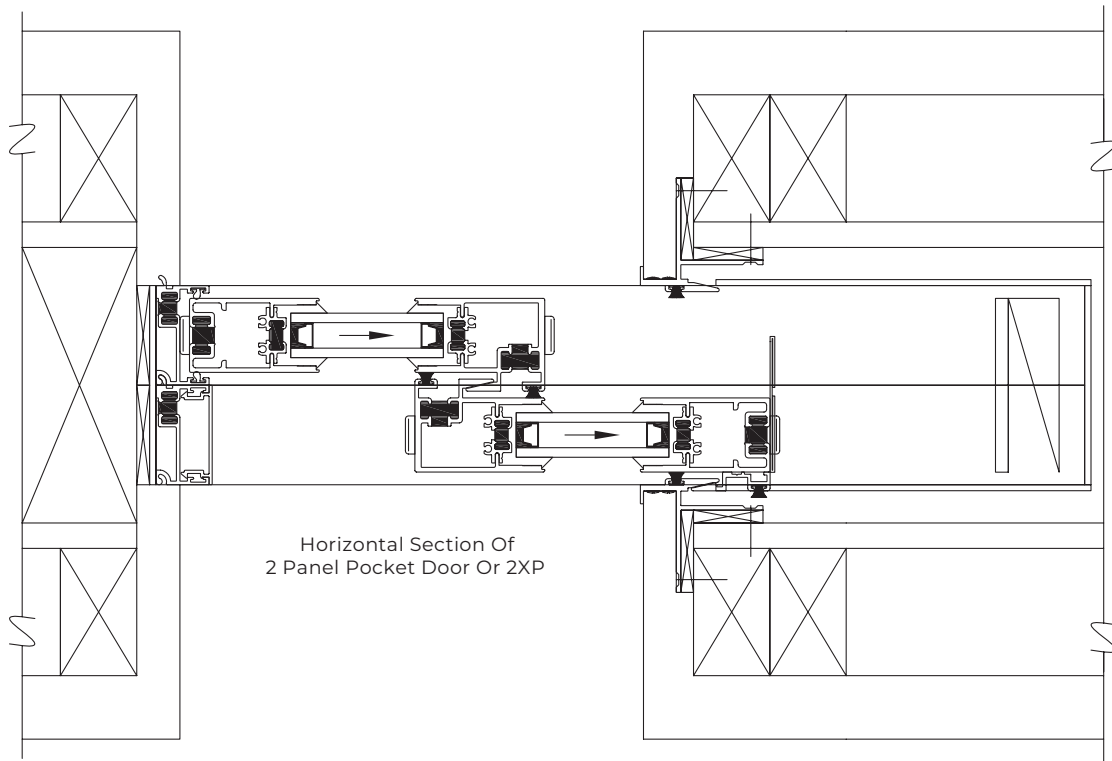

Horizontal Section Of  
3 Panel Stacking Door Or 2XO




# CLASSIC SERIES 600 MULTI-SLIDE DOOR


## PRODUCT DATA SHEET



FOR MORE  
CAD DETAILS  
SCAN HERE

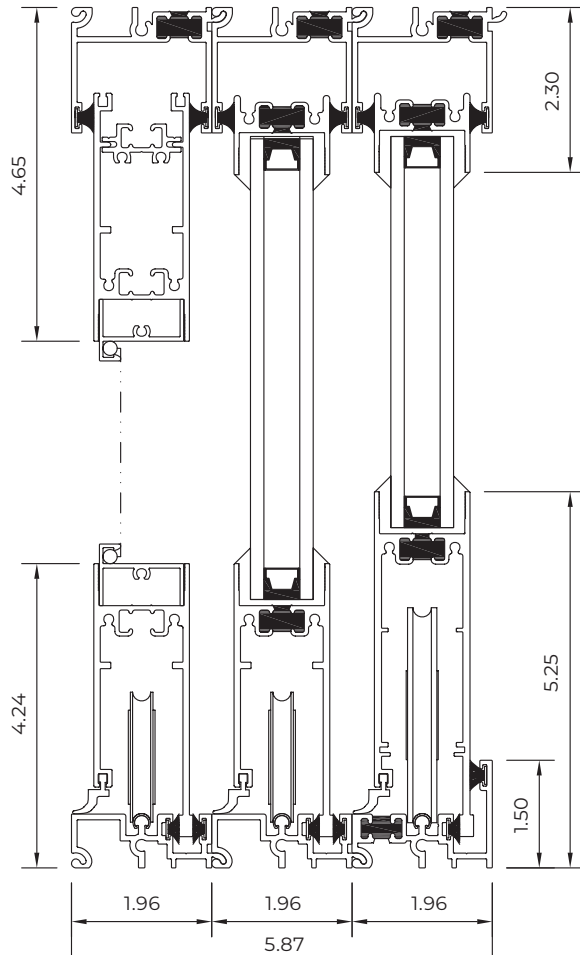

Vertical Section Of Exterior Screen  
1.81" Diameter Roller  
3.00" Diameter Roller  
Water Barrier Threshold

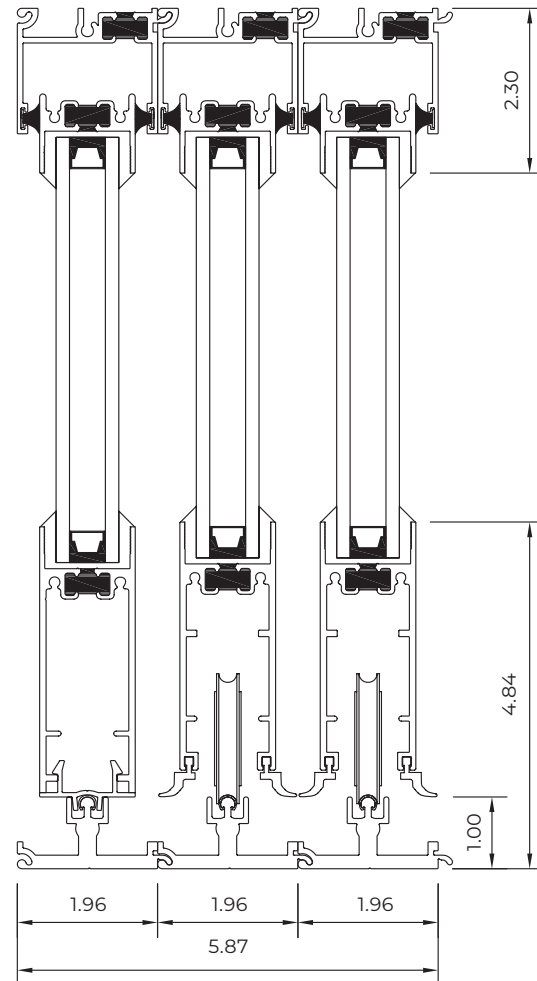

Vertical Section Of Thinline Threshold  
With 1.81" Diameter Rollers




# CLASSIC SERIES 600 MULTI-SLIDE DOOR


## PRODUCT DATA SHEET



FOR MORE  
CAD DETAILS  
SCAN HERE

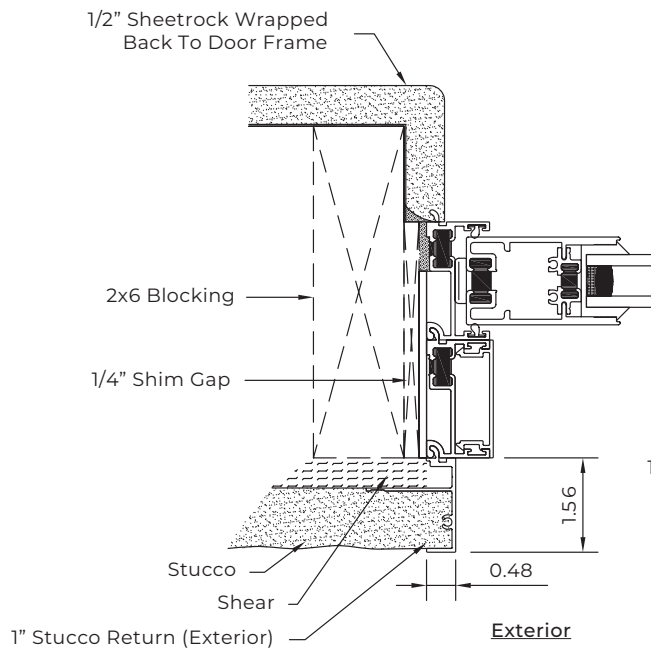

1" Stucco Return Wall Construction Profile At Stud  
Multi-Slide Stacking Door Jamb Application

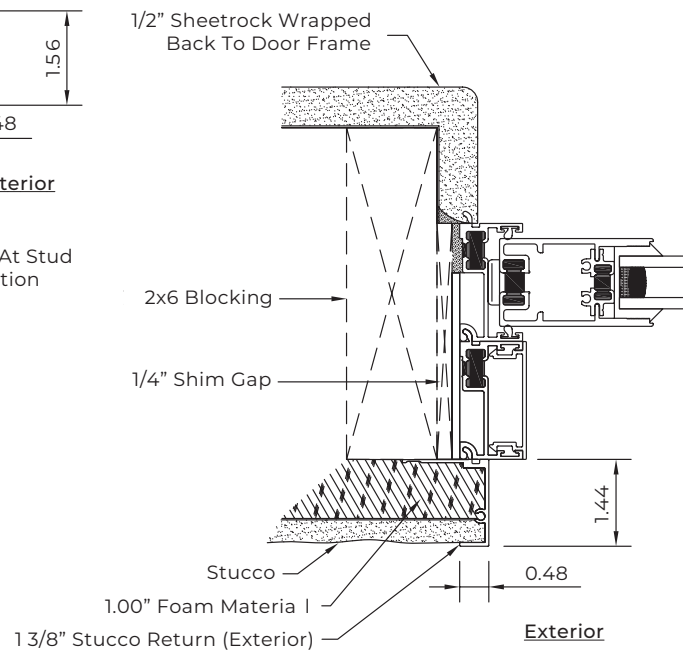

1.375" Stucco Return Wall Construction Profile At Stud  
Multi-Slide Stacking Door Jamb Application




# CLASSIC SERIES 600 MULTI-SLIDE DOOR


## PRODUCT DATA SHEET



FOR MORE  
CAD DETAILS  
SCAN HERE

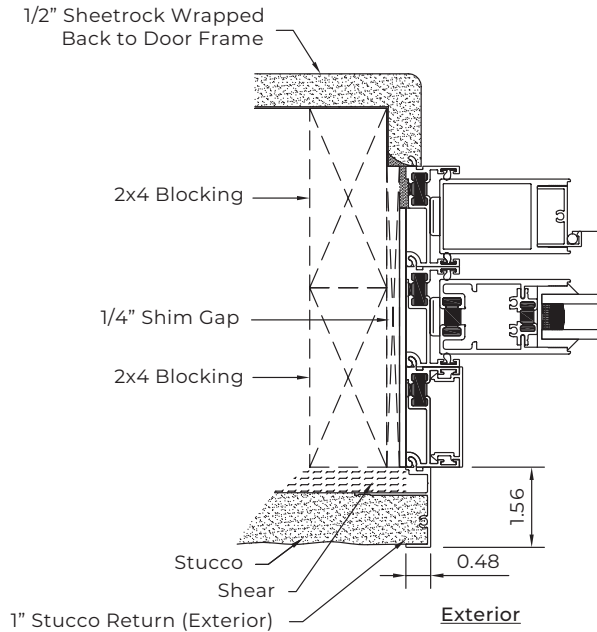

1" Stucco Return Wall Construction Profile At Stud  
Multi-Slide Stacking Door Jamb Application

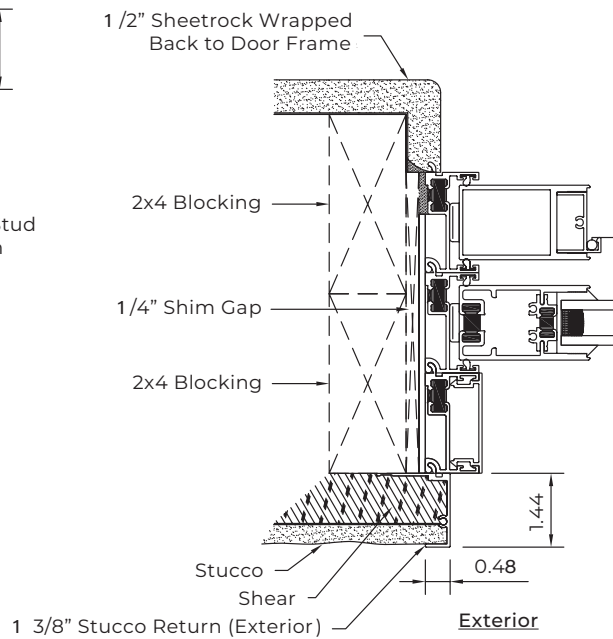

1.375" Stucco Return Wall Construction Profile At Stud  
Multi-Slide Stacking Door Jamb Application