




CLASSIC SERIES 600 WINDOW WALL

PRODUCT DATA SHEET



FOR MORE
CAD DETAILS
SCAN HERE

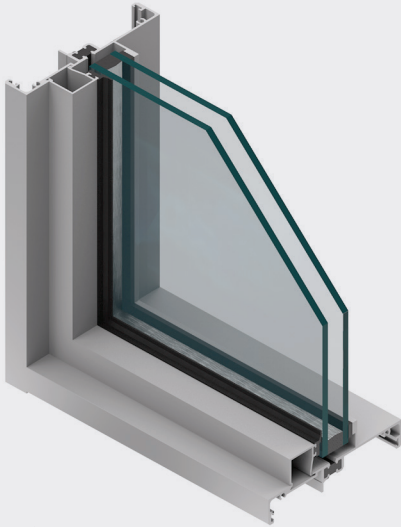

Classic Series 600 Window Wall

The Series 600 Window Wall provides you the opportunity to replace a traditional exterior wall with huge panels of low-E dual-pane glass. With its ability to integrate with various ventilating window styles and our hinged, folding and sliding doors, it's flexible as well as functional. Available up to 60 square feet in countless configurations, the window wall is tested for durability and features a high design pressure rating in most sizes. Narrow sightlines result in a clean, contemporary look.

Energy Efficiency

- Low-E, argon-filled dual-pane glass
- .35 U-value

Hardware

- 1.81" roller
- 3" Monster roller
- Water barrier sill
- Flush sill
- Thinline sill
- Flush-mounted handle
- Premium handle
- Contemporary handle

Options

Sill options include a water-barrier sill, featuring a 1.5" interior leg and weep system to keep out water; a flush sill, which is best when ease of entry is more important than keeping out the elements; and the Thinline sill, which is ideal in situations where the continuation of flooring from the inside to the outside appears seamless. Handle options include a flush-mounted handle, which allows panels to slide past each other and stack flush or into a pocket. The premium handle features a minimal one-piece design and comfortable grip. Both handles have an optional keyed cylinder.

Finishes and Colors

Finishes are available in-stock or as designer selections, and they can be customized to match nearly any color. Bronze Anodized and Satin Anodized come standard with a Class 1 coating thickness for increased smoothness and durability. Our designer colors include a high-quality paint finish that conforms to a minimum rating of AAMA-2605, currently the highest rating for organic finishes.

Performance Table

Frame Depth	4 1/2"
AAMA Product Designation (AAMA/WDMA/CSA101/I.S.2/A440 Designation)	CW-PG50-60x120-FW
Test Configuration	60" x 120" O
Air Infiltration (Per ASTM E 283)	.00 cfm/sf @1.57 psf
CSA A440 Air	Fixed
Water Resistance (Per ASTM E 547)	7.5 psf
Uniform Load Deflection (Per ASTM E 330)	50 psf
Uniform Load Structural (Per ASTM E 330)	75 psf
Forced Entry Resistance	ASTM F842 Type D Grade 10 CAWM 301 Type V
U-Factor (Per NFRC 100)*	0.35
CR (Per NFRC 500)*	44
CRF Frame (Per AAMA 1503)	31

Actual values may vary depending on product specifications and configuration.

* Glass Makeup = 1" OA E366/Argon/Clear




CLASSIC SERIES 600 WINDOW WALL


PRODUCT DATA SHEET




FOR MORE
CAD DETAILS
SCAN HERE

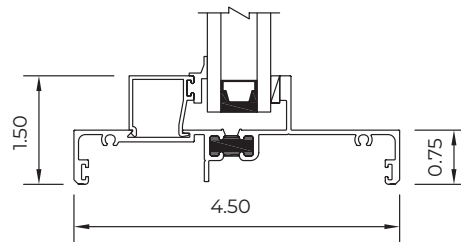

Standard Sill

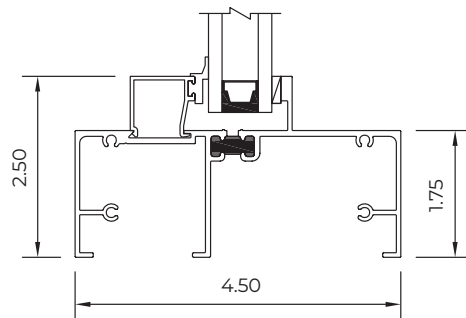

Highbase Sill

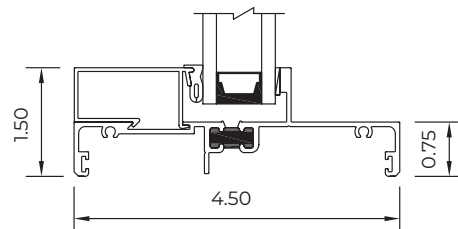

Standard Sill With Flush Stop




CLASSIC SERIES 600 WINDOW WALL


PRODUCT DATA SHEET




FOR MORE
CAD DETAILS
SCAN HERE

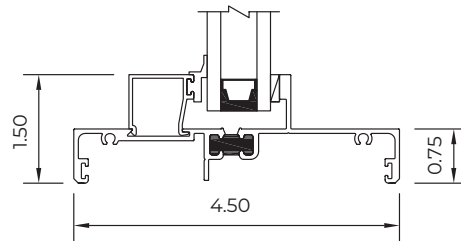

Standard Sill

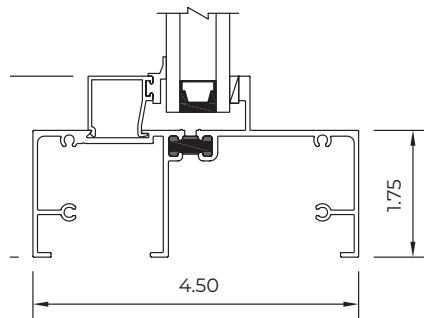

Highbase Sill

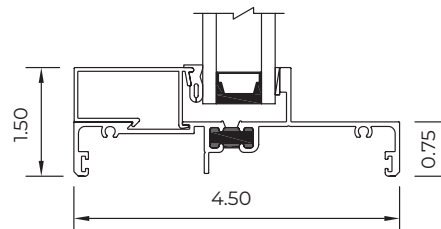

Standard Sill With Flush Stop