




PERFORMANCE SERIES 7600 MULTI-SLIDE DOOR

PRODUCT DATA SHEET



FOR MORE
CAD DETAILS
SCAN HERE

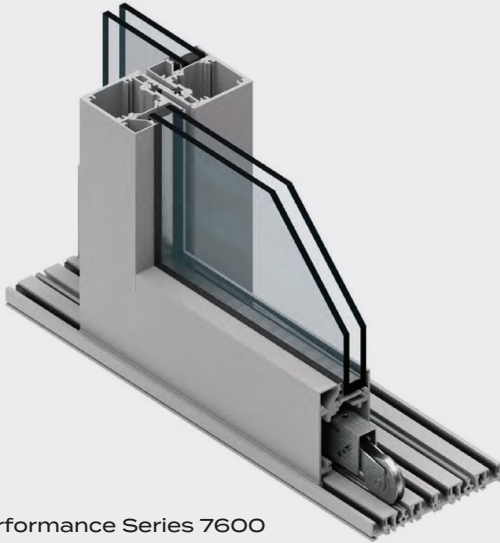

Performance Series 7600 Multi-Slide Door

The Series 7600 Multi-Slide Door features large, unobstructed rolling glass panels that stack or slide into pockets to create extrawide openings for indoor/outdoor living spaces and commercial applications. And even with extreme panel sizes, it is easy to operate, thanks to sealed stainless steel ball bearing rollers. The aluminum frame's clean lines, narrow profile, and high-quality anodized or painted finishes deliver a contemporary aesthetic that seamlessly blends into nearly any space.

Energy Efficiency

- Low-E, argon-filled dual-paned, triple-paned glass
- .31 U-value

Hardware

- 1.81" roller
- Quad-Zilla roller
- Thinline sill
- Water barrier sill
- Flush sill
- Water management sill
- Flush-mounted handle
- Premium handle
- Contemporary handle
- Concealed locking system

Options

Our AAMA-certified, sealed stainless steel ball bearing rollers come in a standard 1.81" size, with optional Quad-Zilla rollers for larger, heavier panels. A concealed stainless steel multipoint lock ensures panel security.

Finishes and Colors

Finishes are available in-stock or as designer selections, and they can be customized to match nearly any color. Split finishes are available in many combinations. Bronze Anodized and Satin Anodized come standard with a Class 1 coating thickness for increased smoothness and durability. Our designer colors include a high-quality paint finish that conforms to a minimum rating of AAMA-2605, currently the highest rating for organic finishes.

Performance Table

Frame Depth	2.87" Per Track
AAMA Product Designation (AAMA/WDMA/CSA101/I.S.2/A440 Designation)	LC-PG50-144x120-SD
Test Configuration	144" x 120" XXO
Air Infiltration (Per ASTM E 283)	24 cfm/sf @1.57 psf
CSA A440 Air	A2
Water Resistance (Per ASTM E 547)	8.0 psf
Uniform Load Deflection (Per ASTM E 330)	50 psf
Uniform Load Structural (Per ASTM E 330)	75 psf
Forced Entry Resistance	ASTM F842 Type B Grade 10
U-Factor (Per NFRC 100)*	0.31
CR (Per NFRC 500)*	59
CRF Frame (Per AAMA 1503)	N/A

Actual values may vary depending on product specifications and configuration.

* Glass Makeup = 1" OA E366/Argon/Clear




PERFORMANCE SERIES 7600 MULTI-SLIDE DOOR


PRODUCT DATA SHEET




FOR MORE
CAD DETAILS
SCAN HERE

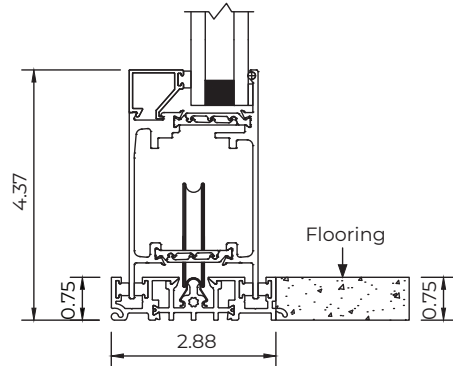


Flush Threshold With Tandem,
Quad-Zilla, And Dual-Pane Glass

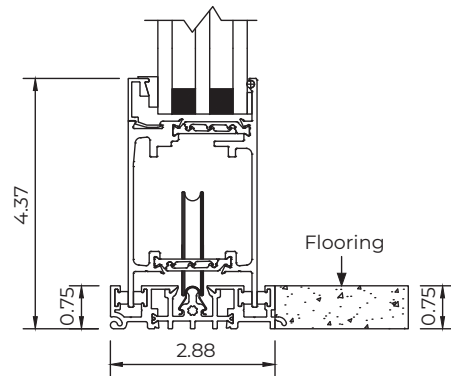

Flush Threshold With Tandem,
Quad-Zilla, And Triple-Pane Glass

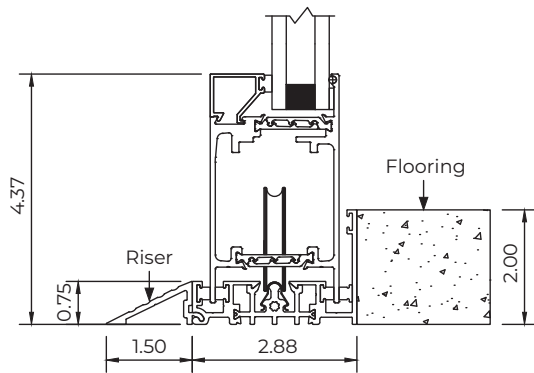

2" Threshold With Tandem And
Quad-Zilla

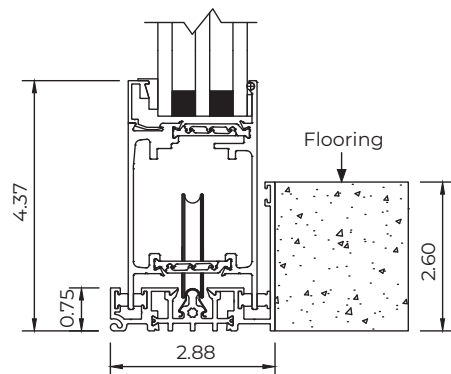

High-Performance 2.6" Threshold With
Tandem And Quad-Zilla




PERFORMANCE SERIES 7600 MULTI-SLIDE DOOR


PRODUCT DATA SHEET




FOR MORE
CAD DETAILS
SCAN HERE

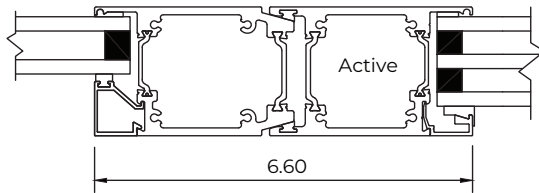


Bi-Parting Condition

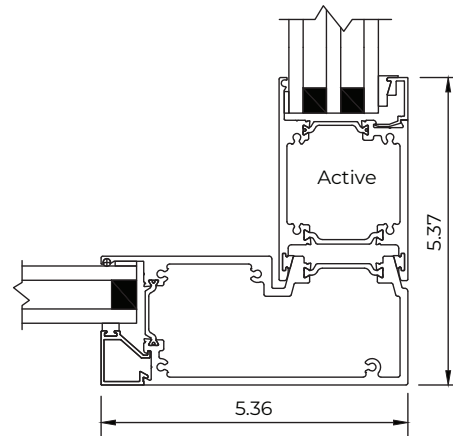

90-Degree Condition

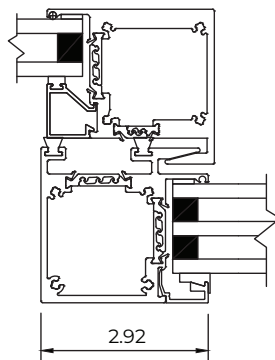

Interlocking Condition



Fixed Position




PERFORMANCE SERIES 7600 MULTI-SLIDE DOOR

PRODUCT DATA SHEET



FOR MORE
CAD DETAILS
SCAN HERE

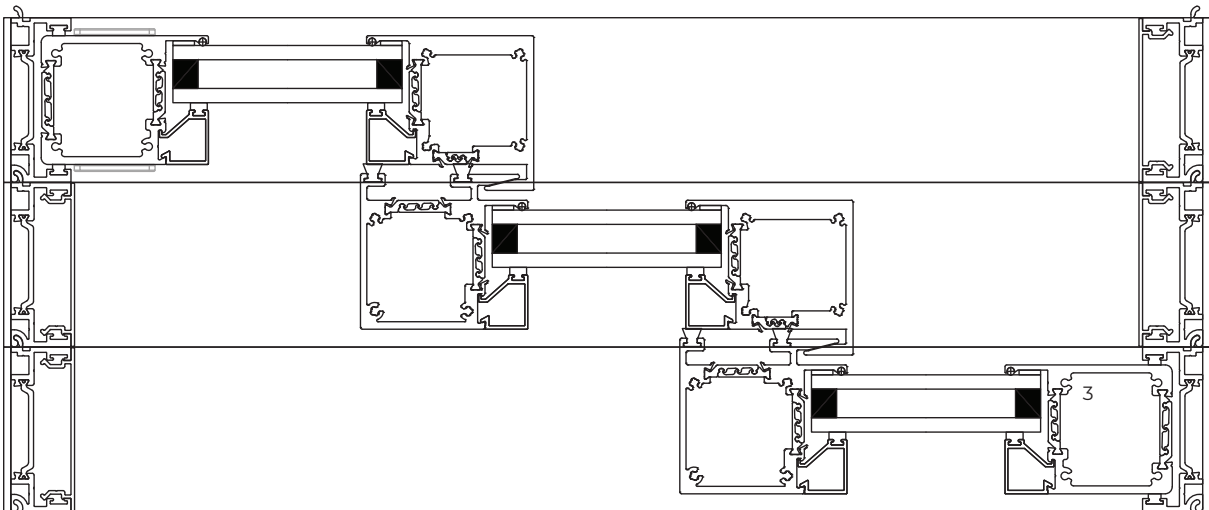

Horizontal Section Of
3-Panel Stacking Door Or 2XO




PERFORMANCE SERIES 7600 MULTI-SLIDE DOOR

PRODUCT DATA SHEET



FOR MORE
CAD DETAILS
SCAN HERE

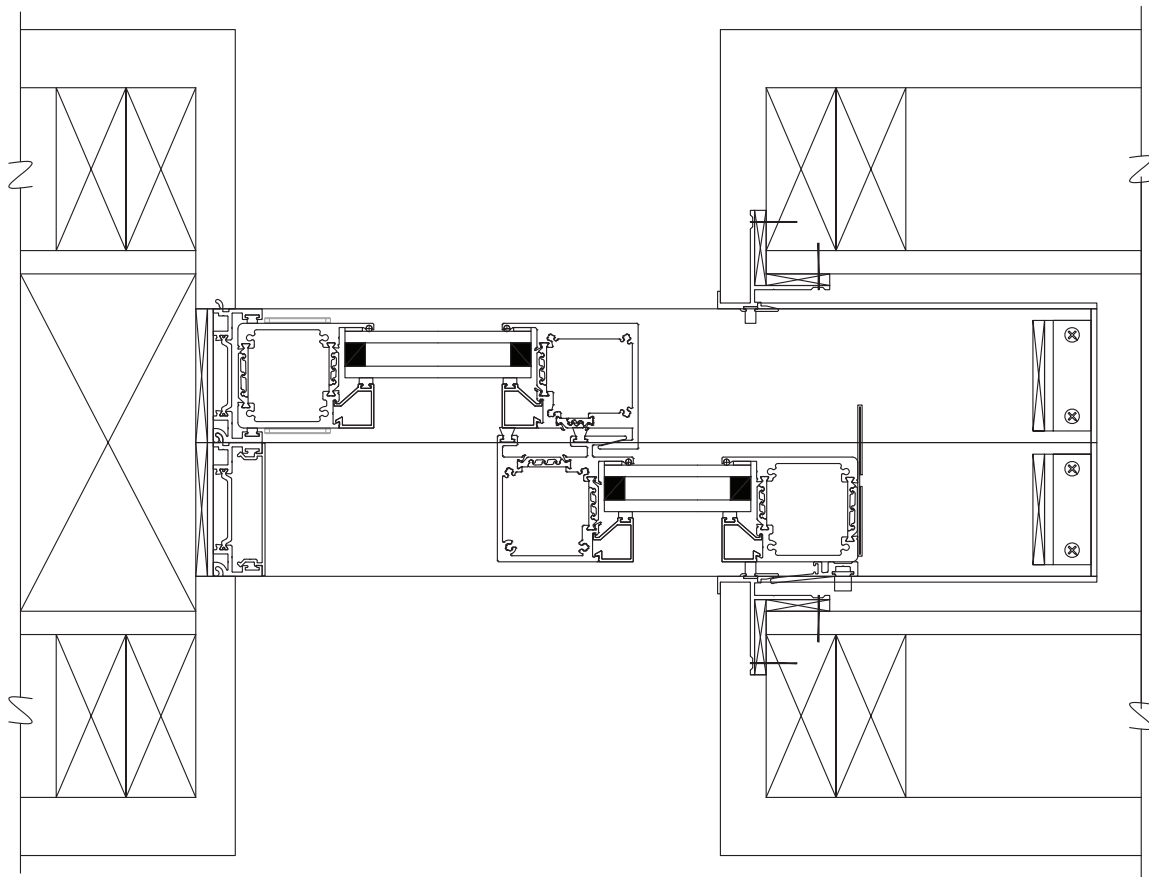

Horizontal Section Of
2-Panel Pocket Door Or 2XP




PERFORMANCE SERIES 7600 MULTI-SLIDE DOOR

PRODUCT DATA SHEET



FOR MORE
CAD DETAILS
SCAN HERE

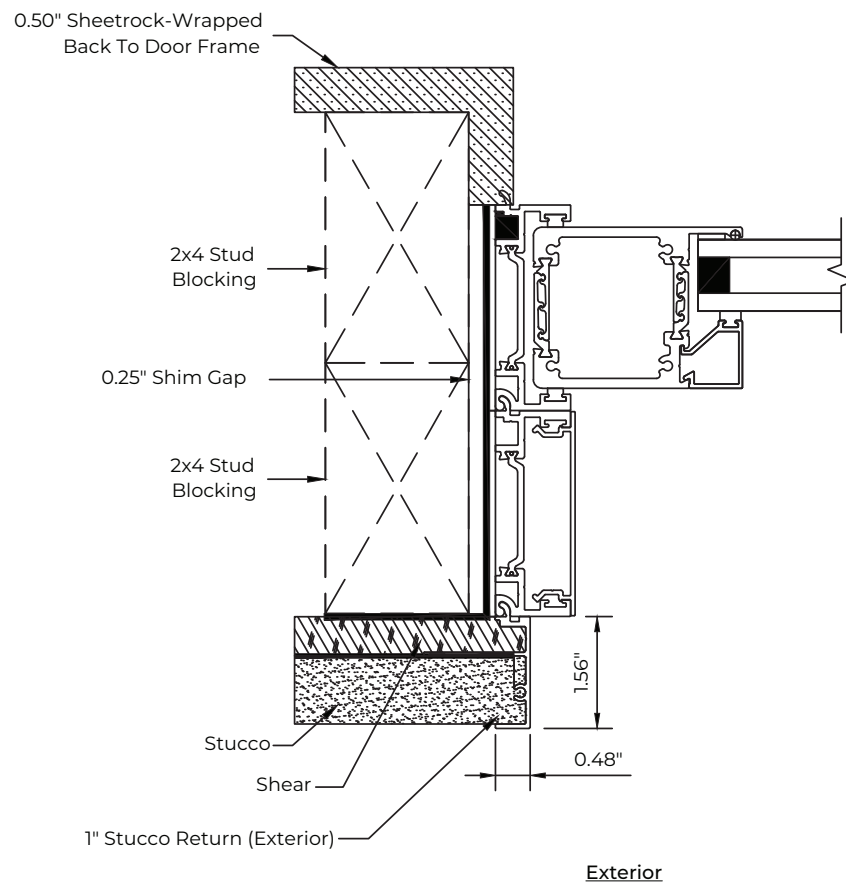

1" Stucco Return Wall Construction Profile At Stud
Multi-Slide Door Jamb Application




PERFORMANCE SERIES 7600 MULTI-SLIDE DOOR

PRODUCT DATA SHEET



FOR MORE
CAD DETAILS
SCAN HERE

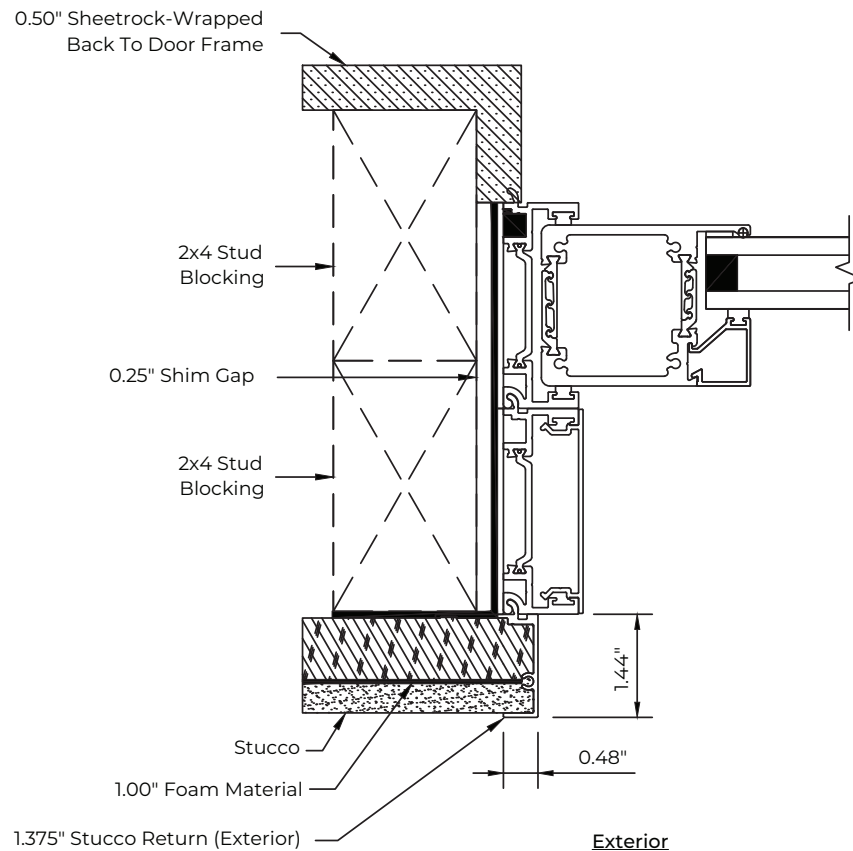

1.375\" Stucco Return Wall Construction Profile At Stud
Multi-Slide Door Jamb Application