




PERFORMANCE SERIES 7600 WATER MANAGEMENT SILL MULTI-SLIDE DOOR

PRODUCT DATA SHEET



FOR MORE
CAD DETAILS
SCAN HERE

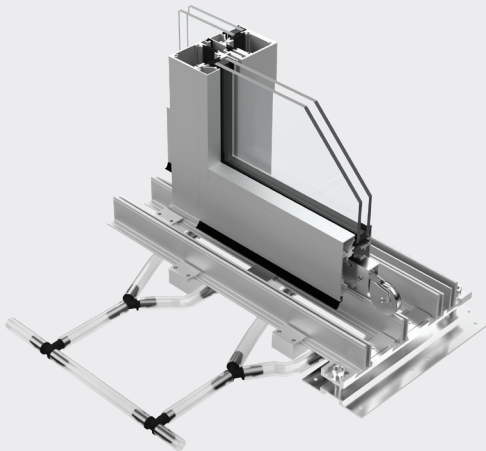

Performance Series 7600 Multi-Slide Door With Water Management Sill

The Series 7600 Multi-Slide Door with Water Management Sill features large, unobstructed rolling glass panels that stack flush to create extra-wide openings with seamless flooring transitions to connect indoor/outdoor commercial and living spaces. And even with extreme panel sizes, it is easy to operate, thanks to high-performance sealed bearing polymer rollers. The aluminum frame's clean lines, narrow profile, and high-quality anodized or painted finishes deliver a contemporary aesthetic that seamlessly blends into nearly any space, while managing water penetration through an innovative hidden subfloor drain system.

Energy Efficiency

- Low-E, argon-filled dual-paned, triple-paned glass
- .32 U-value

Hardware

- 1.81" roller
- Quad-Zilla roller
- Thinline sill
- Water barrier sill
- Flush sill
- Water management sill
- Flush-mounted handle
- Premium handle
- Contemporary handle
- Concealed locking system

Options

Sealed bearing polymer rollers, flush-mounted handle, contemporary handle, optional keyed lock. Hidden stainless steel multi-point lock ensures reliability.

Finishes and Colors

Finishes are available in-stock or as designer selections, and they can be customized to match nearly any color. Split finishes are available in many combinations. Bronze Anodized and Satin Anodized come standard with a Class 1 coating thickness for increased smoothness and durability. Our designer colors include a high-quality paint finish that conforms to a minimum rating of AAMA-2605, currently the highest rating for organic finishes.

Performance Table

Frame Depth	2.87" Per Track
AAMA Product Designation (AAMA/WDMA/CSA101/I.S.2/A440 Designation)	CW-PG50 - 108" x 84" - SD
Test Configuration	108" x 84" XXO
Air Infiltration (Per ASTM E 283)	0.06 cfm/sf @ 1.57 psf
CSA A440 Air	N/A
Water Resistance (Per ASTM E 547)	9.0 psf
Uniform Load Deflection (Per ASTM E 330)	50 psf
Uniform Load Structural (Per ASTM E 330)	75 psf
Forced Entry Resistance	ASTM F842 Type B Grade 10
U-Factor (Per NFRC 100)*	0.32
CR (Per NFRC 500)*	57
CRF Frame (Per AAMA 1503)	N/A

Actual values may vary depending on product specifications and configuration.

* Glass Makeup = 1" OA E366/Argon/Clear





PERFORMANCE SERIES 7600 WATER MANAGEMENT SILL MULTI-SLIDE DOOR

PRODUCT DATA SHEET



FOR MORE
CAD DETAILS
SCAN HERE

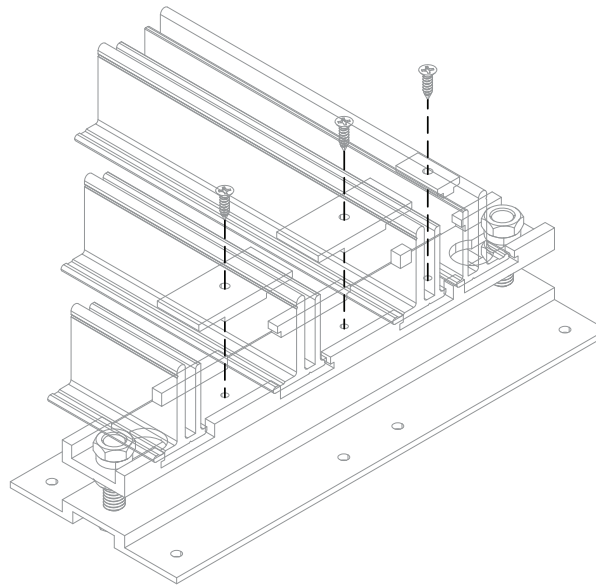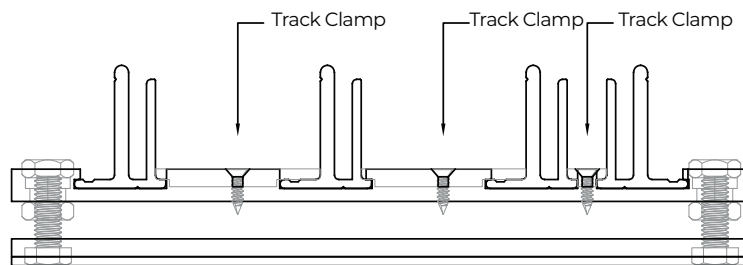

Threshold Condition At Track Clamps





PERFORMANCE SERIES 7600 WATER MANAGEMENT SILL MULTI-SLIDE DOOR

PRODUCT DATA SHEET



FOR MORE
CAD DETAILS
SCAN HERE

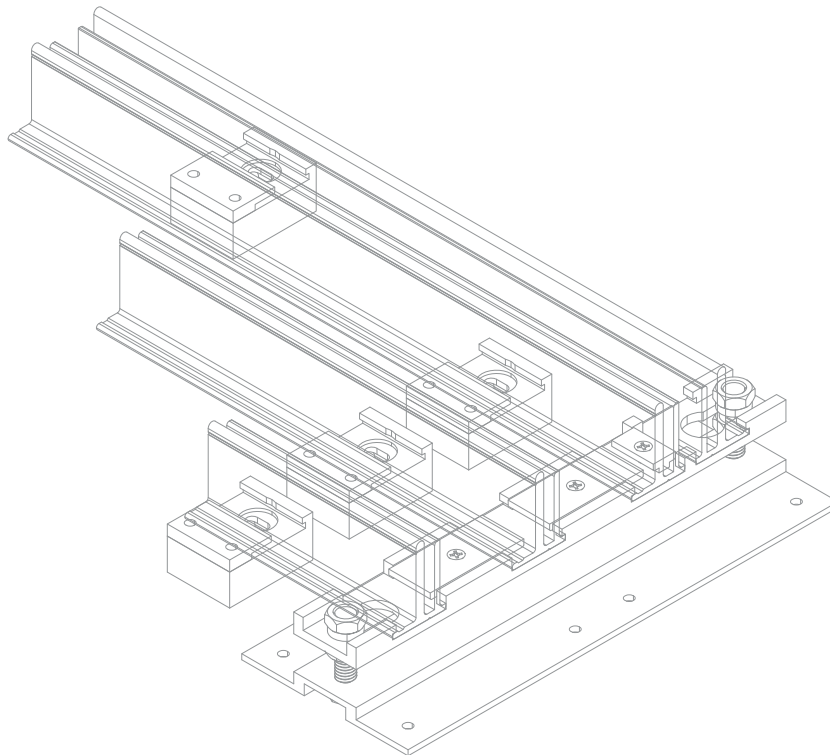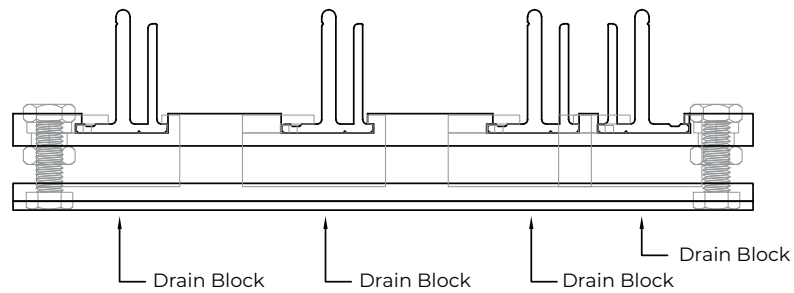

Threshold Condition At Drain Block




PERFORMANCE SERIES 7600 WATER MANAGEMENT SILL MULTI-SLIDE DOOR


PRODUCT DATA SHEET



FOR MORE
CAD DETAILS
SCAN HERE

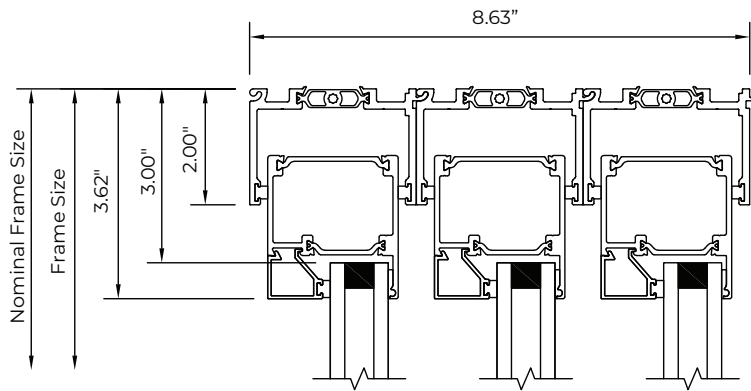

Head Condition

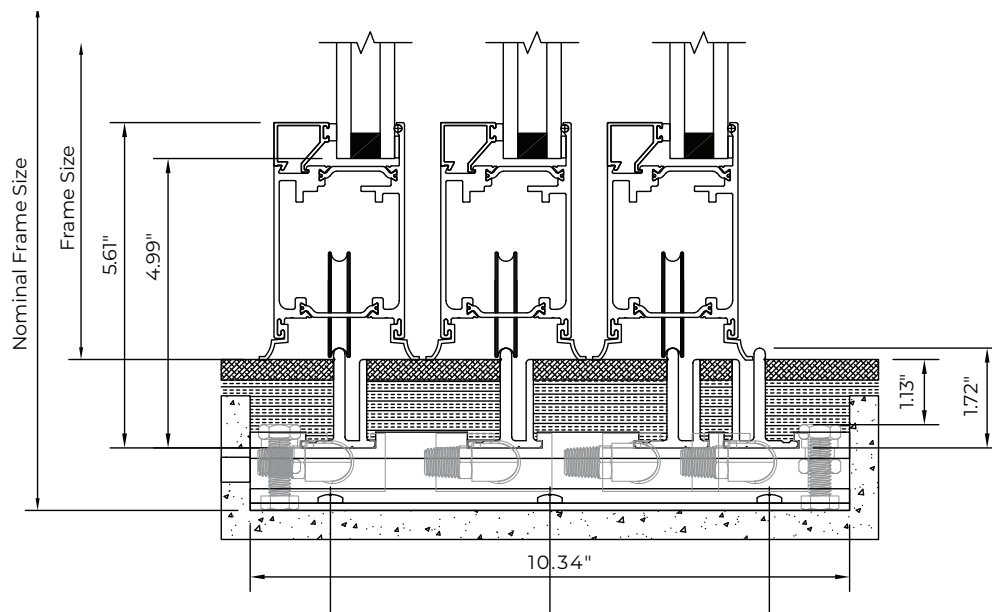

Threshold Condition




PERFORMANCE SERIES 7600 WATER MANAGEMENT SILL MULTI-SLIDE DOOR


PRODUCT DATA SHEET




FOR MORE
CAD DETAILS
SCAN HERE

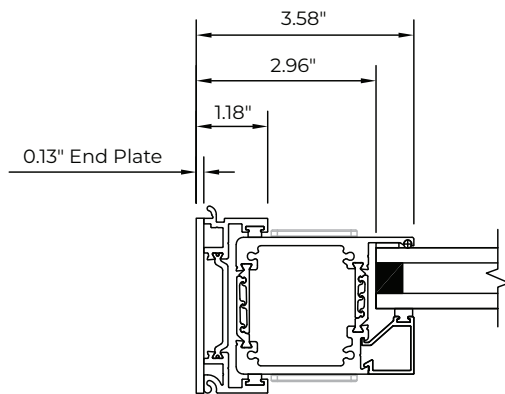


Left Jamb Condition

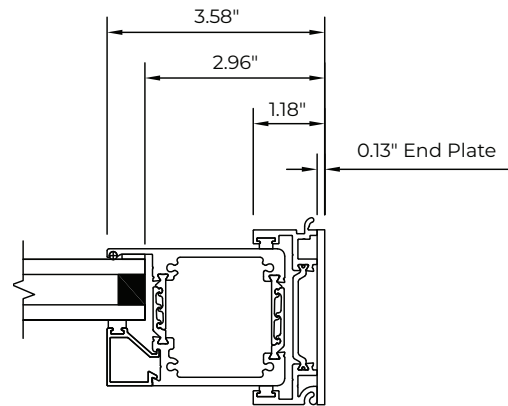

Right Jamb Condition

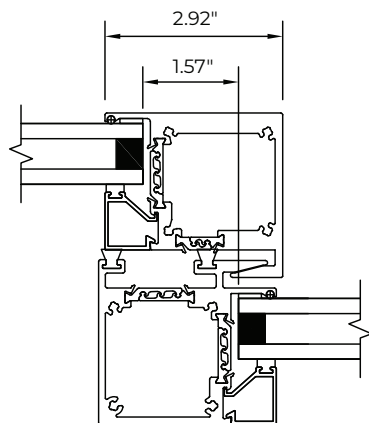

Interlocking Condition



Full Jamb Condition TYP




PERFORMANCE SERIES 7600 WATER MANAGEMENT SILL MULTI-SLIDE DOOR

PRODUCT DATA SHEET



FOR MORE
CAD DETAILS
SCAN HERE

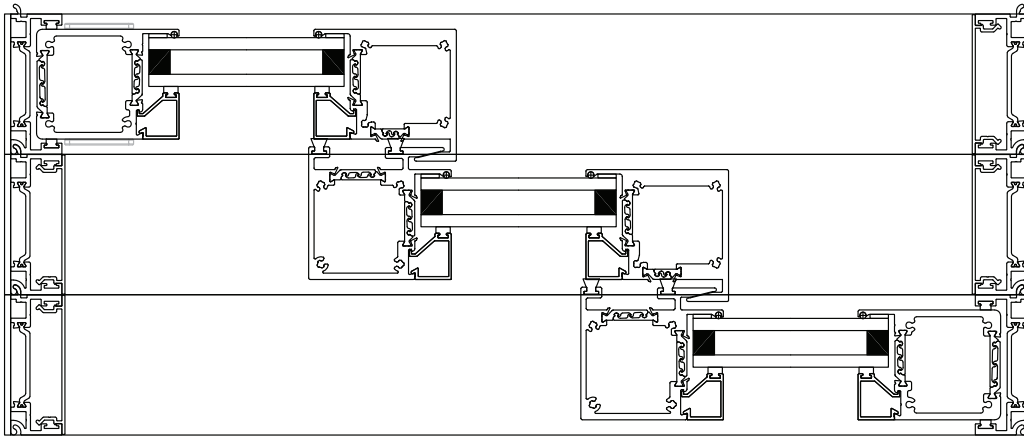

Horizontal Section Of 3-Panel Stacking Door Or 2XO




PERFORMANCE SERIES 7600 WATER MANAGEMENT SILL MULTI-SLIDE DOOR

PRODUCT DATA SHEET



FOR MORE
CAD DETAILS
SCAN HERE

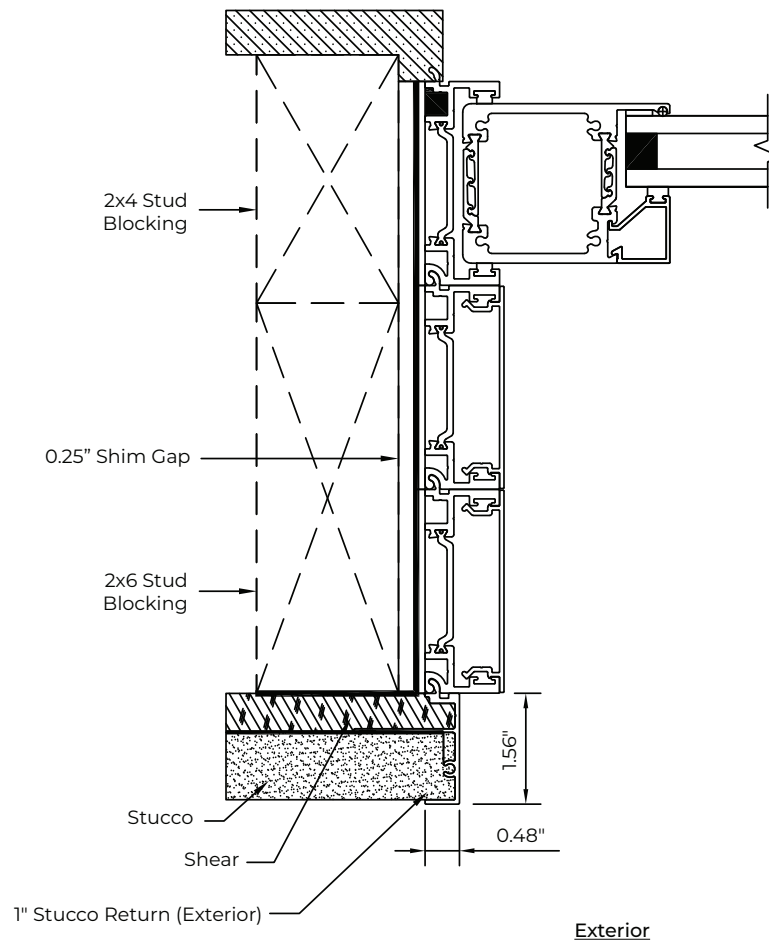

1" Stucco Return Wall Construction Profile At Stud
Multi-Slide Door Jamb Application




PERFORMANCE SERIES 7600 WATER MANAGEMENT SILL MULTI-SLIDE DOOR

PRODUCT DATA SHEET



FOR MORE
CAD DETAILS
SCAN HERE

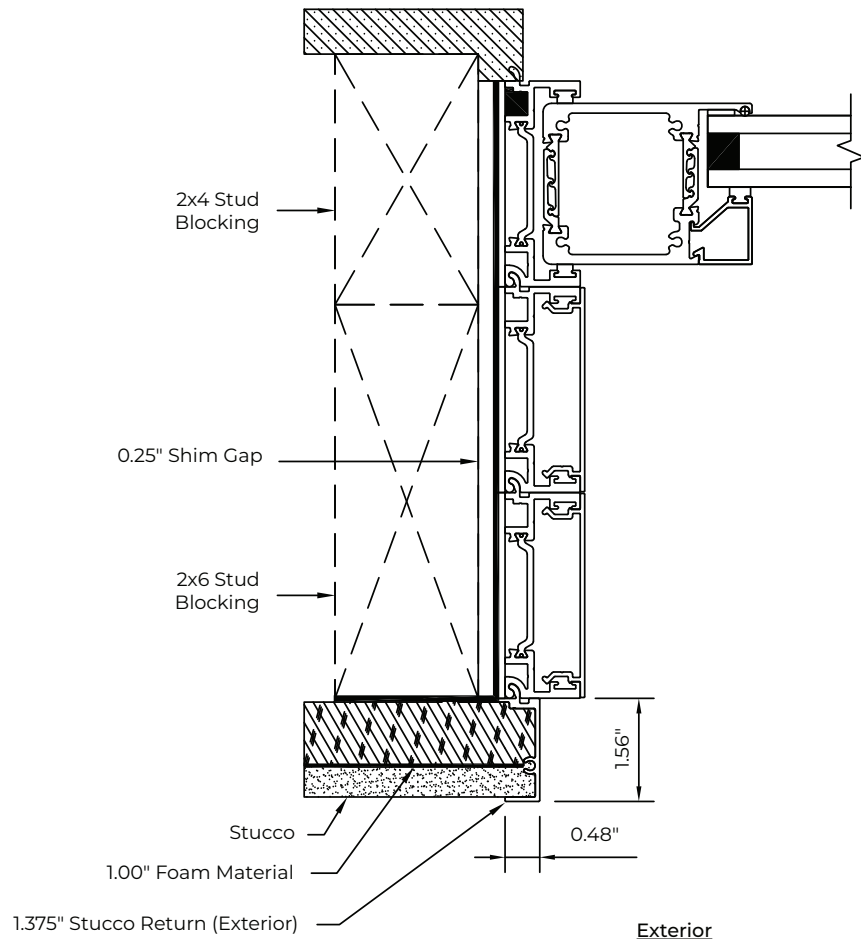

1.375" Stucco Return Wall Construction Profile At
Stud Multi-Slide Door Jamb Application